


ISOLPORTE STANDARD

IS 900 - Silicone
IS 930 - PVC


INSTALLATION

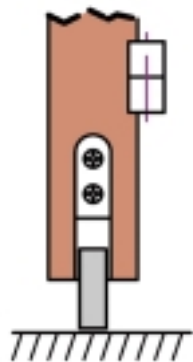

ACCESSORIES SUPPLIED



8 x

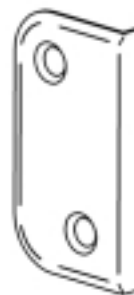

2 x



2 x

SPECIFICATIONS

	Application	Seal profile made of:	
		PVC	Silicone
	Draught-proof	x	x
	Wheelchair Access	x	x
	Smoke Protection	—	x
	Fire Protection	—	x

APPLICATION

For doors with or without rebate. Can be retrofitted into a pre-grooved door.

GROOVE SIZE

12 x 31

ACTUATION

	Single Actuation only	Double Actuation	
		Hinge side	Lock side
	Dimension A	Dimension A	Dimension A
Min. (not released)	0	4	0
Max. (not released)	14	18	14
Actuator travel to achieve max. Sealing height	6	5	2